



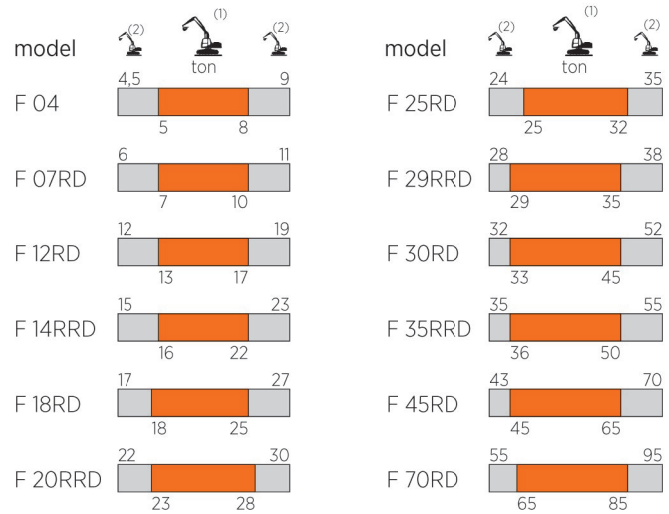

F SERIES

- STATIONARY PULVERIZER
- FRANTUMATORE SECONDARIO
- BROYEUR HYDRAULIQUE
- DEMOLEDOR SECUNDARIO
- STARRE PULVERISIERER

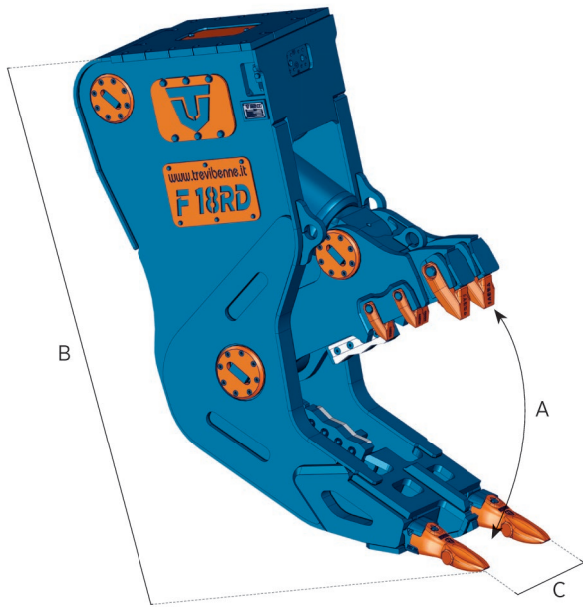

(1) Optimum excavator-equipment combination
 Accoppiamento escavatore-attrezzatura ottimale
 Couplage pelle-équipement optimal
 Acoplamiento excavadora-implemento optimal
 Optimale Bagger-Ausrüstung Kombination

(2) Possible excavator-equipment combination
 Accoppiamento escavatore-attrezzatura possibile
 Couplage pelle-équipement possible
 Acoplamiento excavadora-implemento posible
 Mögliche Bagger-Ausrüstung Kombination



		F 04	F 07RD	F 12RD	F 14RRD*	F 18RD	F 20RRD*	F 25RD	F 29RRD*	F 30RD	F 35RRD*	F 45RD	F 70RD
	kg.	460	680	1250	1530	1990	2405	2650	3310	3070	3720	4490	6430
A	mm.	465	530	730	730	825	825	870	870	950	950	1130	1250
B	mm.	1475	1345	1600	2150	1845	2215	1955	2350	2100	2450	2415	2670
C	mm.	305	365	460	460	540	540	670	670	670	670	760	800
	mm.	140	140	220	220	260	260	260	260	260	260	260	325
	mm.	20	25	30	30	40	40	45	45	50	50	60	75
	bar	320	320	350	350	350	350	350	350	350	350	350	350
	l/min.	80 / 150	80 / 150	120 / 200	120 / 200	200 / 300	200 / 300	250 / 350	250 / 350	300 / 400	300 / 400	350 / 450	450 / 600
	bar	/	/	/	140	/	140	/	140	/	140	/	/
	l/min.	/	/	/	10 / 20**	/	20 / 40**	/	25 / 50**	/	25 / 50**	/	/

*Model equipped with continuous hydraulic 360° rotation / *Modello fornito con rotazione idraulica continua a 360° / *Modèle équipé de rotation hydraulique à 360° en continu



**Modelo entregado con rotación hidráulica continua a 360° / **Modell ausgestattet mit hydraulischer kontinuierliche 360° Drehvorrichtung

**Double motor / **Doppio motore / **Double moteur / **Doble motor / **Doppelmotor



F SERIES

- STATIONARY PULVERIZER WITH MAGNET
- FRANTUMATORE SECONDARIO CON MAGNETE
- BROYEUR HYDRAULIQUE AVEC AIMANT
- DEMOLETOR SECUNDARIO CON IMÁN
- STARRE PULVERISIERER MIT MAGNET

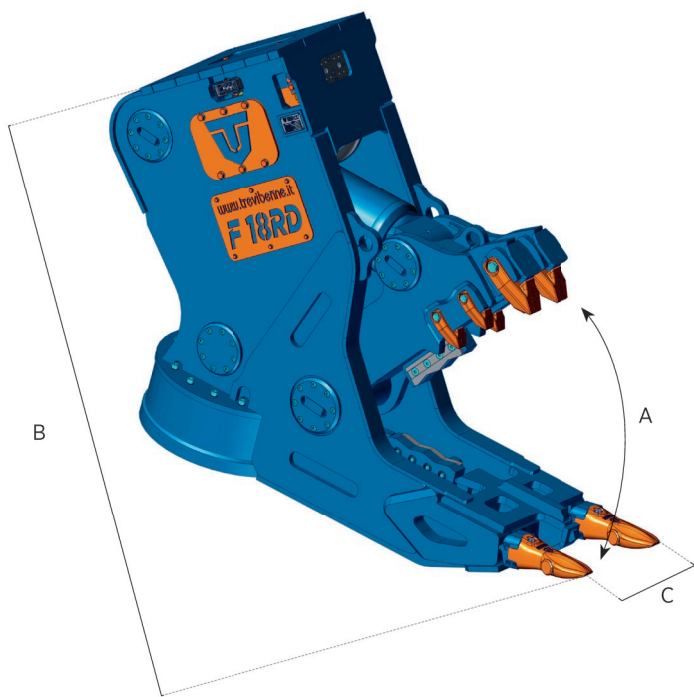

- (1) Optimum excavator-equipment combination
Accoppiamento escavatore-attrezzatura ottimale
Couplage pelle-équipement optimal
Acoplamiento excavadora-implemento optimal
Optimale Bagger-Ausrüstung Kombination
- (2) Possible excavator-equipment combination
Accoppiamento escavatore-attrezzatura possibile
Couplage pelle-équipement possible
Acoplamiento excavadora-implemento posible
Mögliche Bagger-Ausrüstung Kombination



		F 18RDM	F 25RDM	F 30RDM
kg	kg.	2390	3070	3850
Ø	mm.	660	770	770
A	mm.	825	870	950
B	mm.	1845	1955	2100
C	mm.	540	670	670
	mm.	260	260	260
Ø max	mm.	40	45	50
max	bar	350	350	350
	l/min.	200 / 300	250 / 350	300 / 400
	bar	/	/	/
	l/min.	/	/	/



HARDOX®
WEAR PLATE



HARDOX®
IN MY BODY